



REV.	DESCRIPTION	DATE
A		
B		02-2006

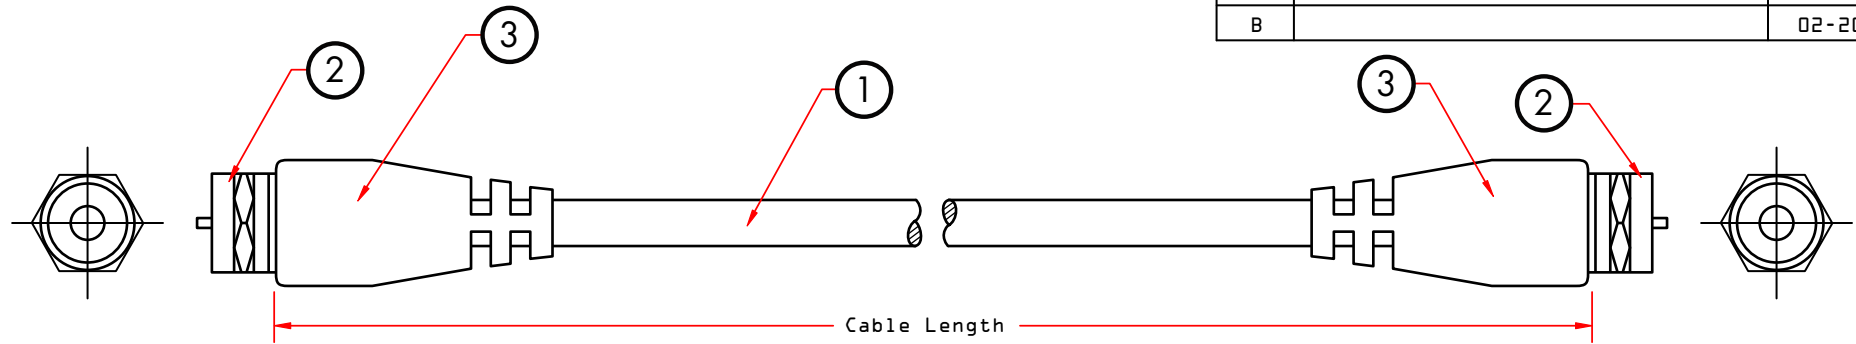

Cable Specifications:


RG59 U-75 Ohm Coaxial Cable
 22AWG 0.643mm Solid Copper Clad Steel Central Conductor
 0.025mm Aluminium-Polyester Foil Shield
 AL-Braid (60% Coverage)
 0.146"/3.7mm OD PE Dielectric
 0.242"/6.0mm OD Black Flex PVC Jacket

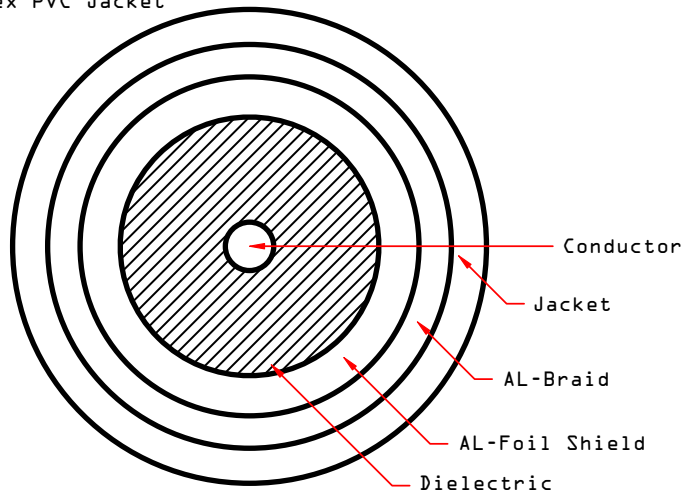

PART NO.	CABLE LENGTH
10X2-01101	1 ft
10X2-01103	3 ft
10X2-01106	6 ft
10X2-01112	12 ft
10X2-01125	25 ft
10X2-01150	50 ft
10X2-01175	75 ft
10X2-011HD	100 ft

3	Black Molded PVC Hood
2	F-Pin Male (RG59) Nickel Plated
1	RG59 Cable, 750hm with AL-Mylar and 60% AL-Braided Shield, Black Outer PVC Jacket
NO.	SPECIFICATIONS

BOM LIST

ITEM NUMBER	10X2-011xx	DRAWER	MPD
TITLE	F-Pin (Coax) Male to F-Pin (Coax) Male, RG59 Cable	CHECKED	MAC
MATERIAL		APPROVED	MAC
REV.	A	SCALE	INCH
DRAWING NO:			
		 888-212-8295.com CableWholesale	