


REV.	DESCRIPTION	DATE
A		
B		02-2006

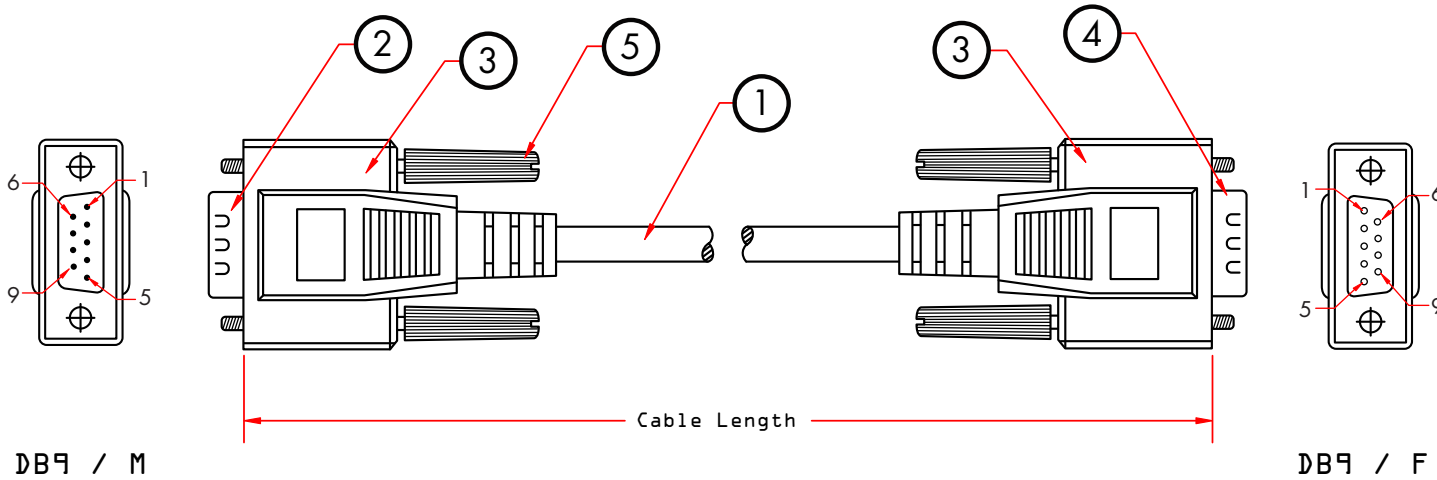

Pin Assignment			
DB9 Male		DB9 Female	
1	—————	1	Brown
2	—————	2	Red
3	—————	3	Orange
4	—————	4	Yellow
5	—————	5	Green
6	—————	6	Blue
7	—————	7	Purple
8	—————	8	Gray
9	—————	9	Black
6	—————	6	

RoHS  
Compliant

PART NO.	CABLE LENGTH
10D1-03203	3 ft
10D1-03206	6 ft
10D1-03210	10 ft
10D1-03215	15 ft
10D1-03225	25 ft
10D1-03235	35 ft
10D1-03250	50 ft
10D1-032HD	100 ft

5	4-40 Molded Thumb Screw, Beige
4	DB9 Female w/Gold Plating Contacts
3	Beige Molded PVC Hood, Fully Shielded w/AL-Foil
2	DB9 Male w/Gold Plating Contacts
1	9C (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Single Shield w/AL-Foil, Beige Outer PVC Jacket UL2464 Equivalent
NO.	SPECIFICATIONS

ITEM NUMBER	10D1-032xx		DRAWER	MPD
TITLE	DB9 Male / DB9 Female, 1:1, Serial Cable		CHECKED	MAC
MATERIAL	SCALE		APPROVED	MAC
REV.	A	UNIT	INCH	
DRAWING NO:				

BOM LIST